


SIC 3460

The SIC 3460 is a high performance ceiling speaker with a 6.5" Kevlar cone woofer and a 1" ferrofluid-cooled soft dome tweeter. Each driver has its own waveguide and crossover for optimum dispersion and frequency response. It is suitable for home theatre and channel music applications.

The SIC 3460 speaker when mounted in the ceiling will be at an angle of 15° to the ceiling. This is a requirement of surround channel speakers for use with most immersive sound technologies. This results in excellent off-axis response for higher intelligibility at the listening position. Compact, powerful and elegantly finished with a magnetic grill, the SIC 3460 blends into your ceiling and reproduces music and movie content efficiently.

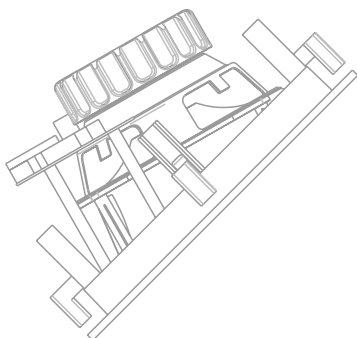

DESCRIPTION	2 way in-ceiling speaker with angled transducers
TRANSDUCERS	1 x 6.5" coaxial speaker
MAX SPL	100dB
FREQ. RANGE (-10dB)	60Hz ~ 21kHz
FREQ. RESPONSE (-3dB)	70Hz ~ 20kHz
SENSITIVITY 1W/1M HALF SPACE	90dB
NOMINAL IMPEDANCE	8Ω
POWER HANDLING	50~100W
OUTER DIM. (depth x dia)	170mm x 248mm
CUT OUT DIMENSION	212mm
COLOUR	White
MOUNTS	Twist-lock type
GROSS WEIGHT	2.2kg

For detailed specifications, please visit www.sonodyne.com • Due to continuous improvements, all specifications are subject to change